



Halo

Laboratory air filtration system

Life in the lab becomes *Simpler Safer*



- Removes fugitive emissions/odors in your lab
- 24/7 filtration
- Laboratory-grade filtration using Neutrodine technology
- Low cost – no ductwork required
- Very low energy consumption (50W)
- Easy set up
- Simple operation

Healthier air for your laboratory

On the job 24/7

Halo is continuously pulling the dirty air in the lab through the filter, adsorbing the molecules that cause noxious odors, and returning clean air back to the room through low-disruptive side vents. The laboratory-grade molecular filtration system contains Neutrodine, a unique and powerful activated carbon mixture combined with a pre-filter that captures a large variety of airborne fumes and odors, which left untreated, could represent a potential health hazard.


Simple to install

Halo is easily installed in the ceiling - no need to connect to your HVAC. Multiple units can be installed to increase the coverage area.


Smart technology

A soft band of light assures the occupants of the lab that the air is clean. When the LED lights slowly pulse, Halo is letting you know that it is sensing and capturing fugitive emissions. You can easily check the status, change the setting, or check for routine maintenance via your smartphone.

Specifications

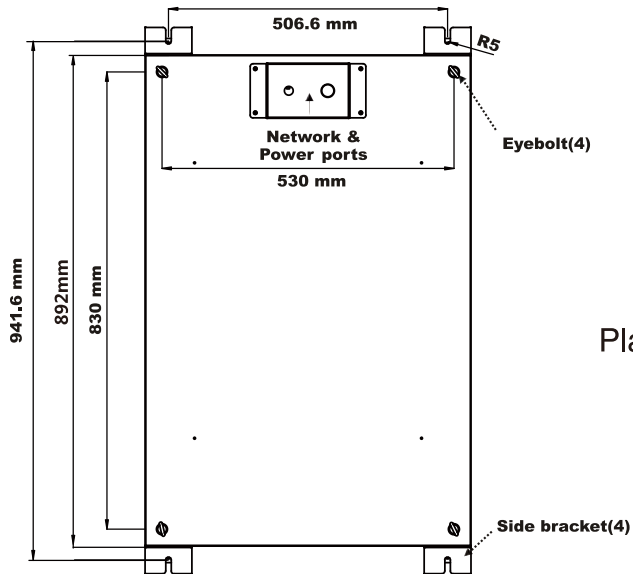

Plan view

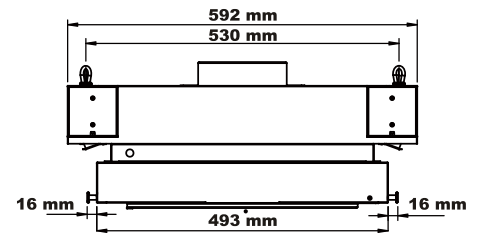

Side view

Halo 3 versions

VOC
Organic vapors
(acids secondary)

Chemplus
Acid vapors
& Organic vapors

Formaldehyde
For Labs with
formaldehyde vapors

Processed air flow	up to 220 m ³ /h		
Operating modes	24/7, Night/Day, Alert		
Detection	Semiconductor sensor	Electro-chemical sensor	Electro-chemical sensor
Fan monitoring	Halo unit monitors the air flow and informs the user through light pulsation communication.		
Pre-filtration	Particulate prefilter		
Filters	VOC	Chemplus	Formaldehyde
Chemical Filter Options	Organic vapors (acids secondary)	Acid vapors & Organic vapors	For Labs with formaldehyde vapors
VOCs detection	Semi conductor sensor		
User Interface	Simple communication by LED pulsation system		
eGuard	App for remote control and monitoring		
Ports	1 Ethernet Port		
Installation	Suspended via metal cables attached to 4 eyebolts or threaded bar attached to 4 side brackets		
Weight	31 kg (including filter)		
Voltage / frequency	100-240V/ 50-60Hz		
Energy consumption	50 W		



Download our eGuard App and see what Halo is sensing

eGuard sends alerts to your preferred device. If the lab air is polluted, it allows you to stay remotely informed about the air quality of your lab.

Available for smartphone



Technical data are not contractual. Erlab reserves the right to modify the present document without prior notice.

Europe

erlab D.F.S S.A.S (France)
Parc d'Affaires des Portes
BP 403
27104 Val de Reuil Cedex - France
Tel. : +33(0)2 32 09 55 80
Fax. : +33(0)2 32 09 55 90
E-Mail : Ventes@erlab.net

erlab S.L (Spain)
Pol. Ind. Sur
Pasaje Newton 3A
08754 El Papiol - Barcelona - Spain
Tel. : +34 93 673 24 74
Fax. : +34 93 673 24 76
E-Mail : Ventas@erlab.net

North America

erlab, Inc. (USA)
388 Newburyport Turnpike
Rowley, MA 01969 - USA
Tel. : +1(978) 948-2216
Fax. : +1(978) 948-3354
E-Mail: CaptairSales@erlab.com

Asia, Middle East, Africa, South America

Kunshan erlab D.F.S Co.,Ltd
No.118 Feng Qin Rd.
KETD Kunshan
Jiangsu Province - China
Tel. : +86 (0)512 5781 4085
Fax. : +86 (0)512 5781 4082
E-Mail : Sales.china@erlab.com.cn

Southeast Asia

erlab SEA Sdn Bhd (Malaysia)
25 Jalan Firma
2/1 Kawasan Perindustrian - Tebrau
81100 Johor Bahru - Malaysia
Tel. : +60 (0)7 355 57 24
Fax. : +60 (0)7 355 28 10
E-Mail : erlab@erlab.com.my



www.erlab.com

Halo Smart_2016_10_01 edition